


HIM shutdown procedure


Friday, June 2, 2023 16:45

Shut down


1. 1 day before the shutdown , stop LN2 refill or start the warmup

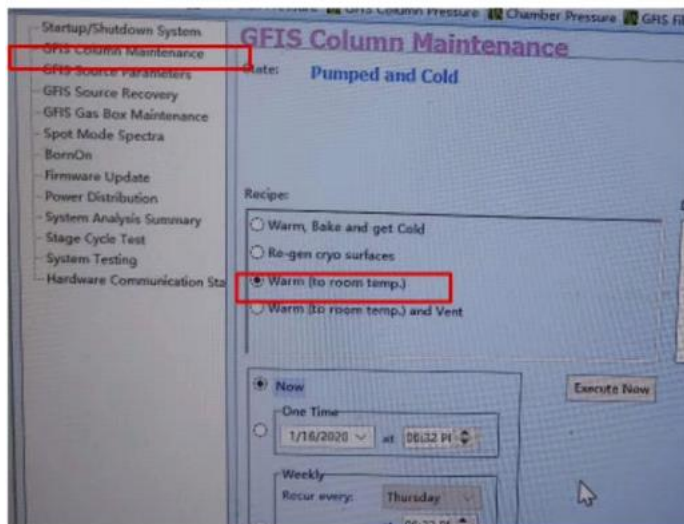

2. Before warming up. Set the column gas off, ET deflector off, Flood gun off, Capella off.

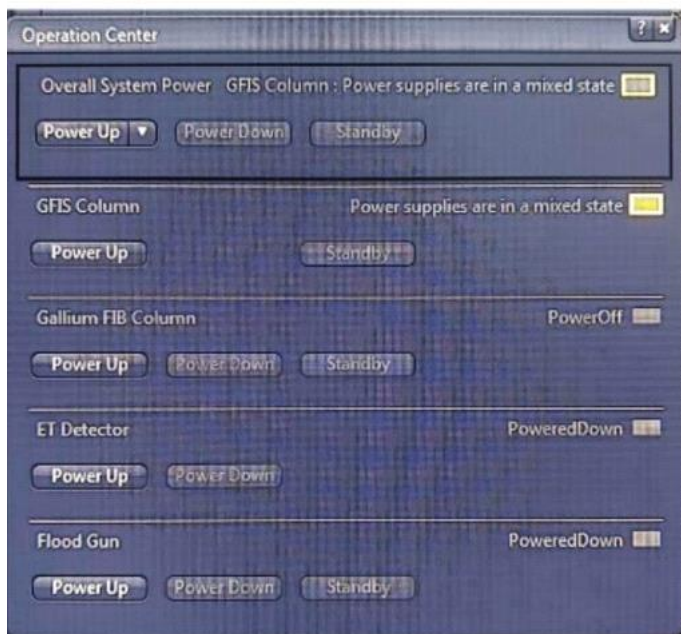

3. For safety, manually turn off GFIS, lens1, lens2, accelerator, extractor high voltage supply. In ZEN, slide the voltage to below 5kV, then in service machine → power distribution, turn off each hv supply
4. Turn off turbo pumps: in the vacuum screen, check Diag on the bottom right corner. Then on the back of the machine, beside the stabilizing module turn off the column valve manually. Then turn off the chamber foreline value (see picture). Finally, turn off column and chamber molecule pumps.

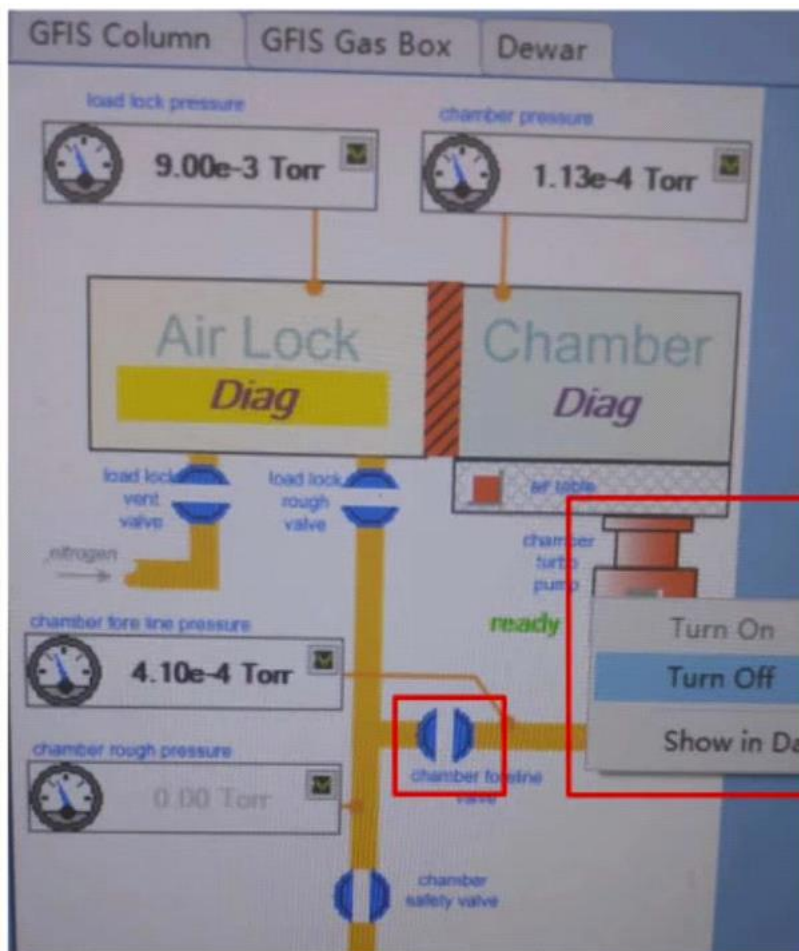


5. Close the 2 ion pumps
6. In the service machine, turn off power supply for Rack1 and Rack2
7. On the black chase rack, turn off Acopian, Duracom, Evactron. Then turn off the wall plug power
8. Close ZEN software, system manager, PC. Close NPVE PC and the controller
9. Turn off UPS. Unplug the UPS
10. Unplug the machine. Unplug Dewar Pump


Turning on

1. Plug the machine. Plug the Dewar pump

2. Plug the UPS and wait for 1-2 min, the UPS online mode will turn on after the self checking
3. Plug the chase rack. Turn on Acopian, Duracom, Evactron one by one. Wait for 3-5 min until you confirm all indicator lights are on.
4. Turn on the PC. Open the system manager, in service machine, check Rack1 and Rack2. Wait 3-5 min

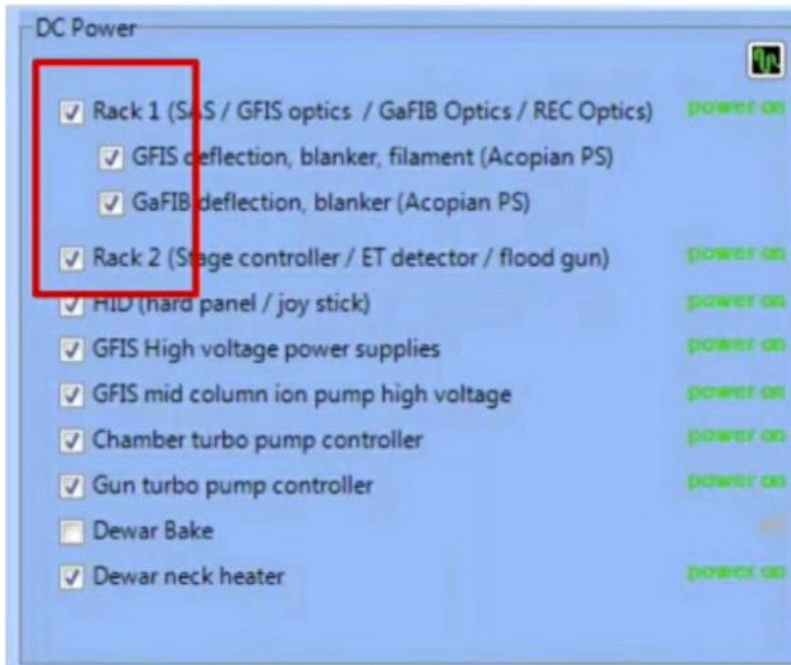


5. In service machine, open firmware upgrade, click query nodes, make sure all firmware are correct

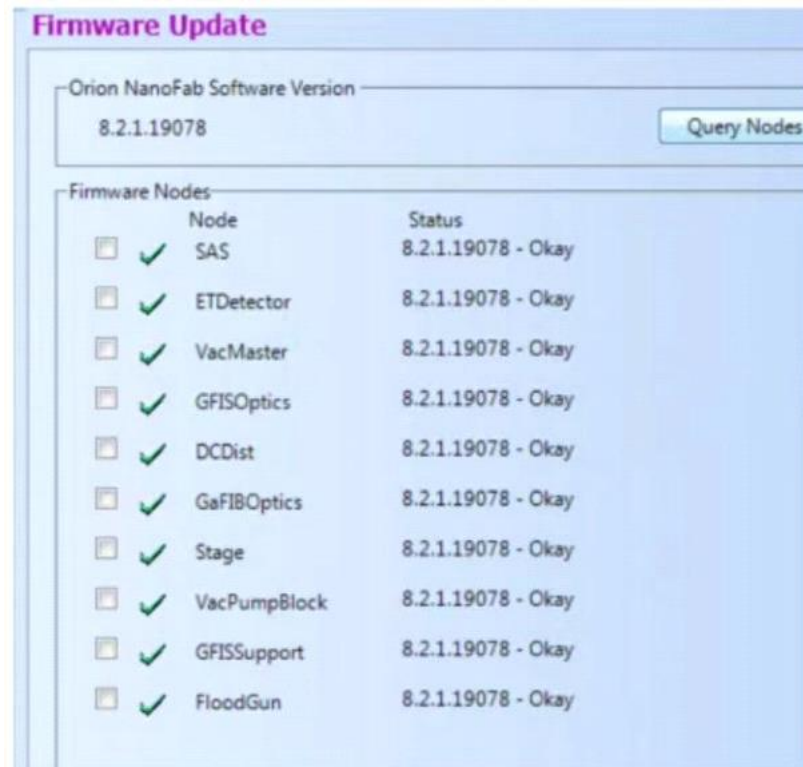

6. Open vacuum screen, when rough pump is on for about 5 min, check pump in the GFIS column. Wait until the Gunn pressure is below $1e-4$ torr, turn on the column manual valve
7. At the same time of step 6, turn on Ga FIB column bypass valve. Choose pump in both column and chamber. Wait for about 10 min until both are pumped on the screen
8. After 2h (better to leave overnight), turn on the 2 ion pump and make sure gun pressure is better than $1e-6$ torr
9. On the column, unplug accelerator, extractor, and lens1. Wrap the high voltage cables with clean

Al foil. Start baking process in the service machine. Baking time recommended to be 72-100h.

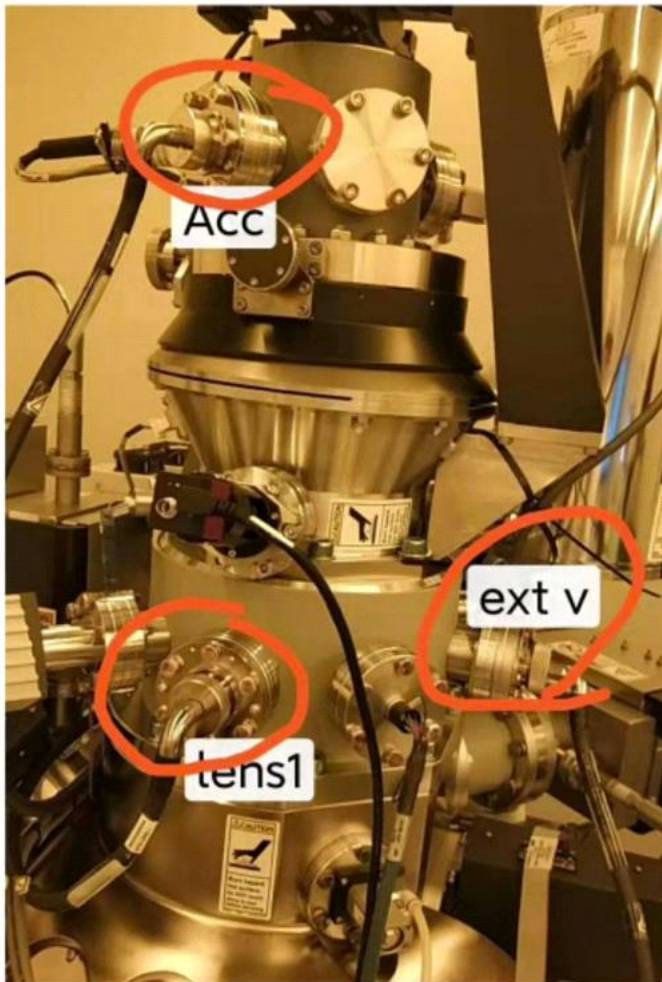

10. Make sure the LN2 supply is sufficient and the LN2 pressure is about 1.5 bar
11. After the baking, reconnect the high voltage cables and form a new trimer